



How to use the Fleece Sweater Pattern

Print out the pattern from our website

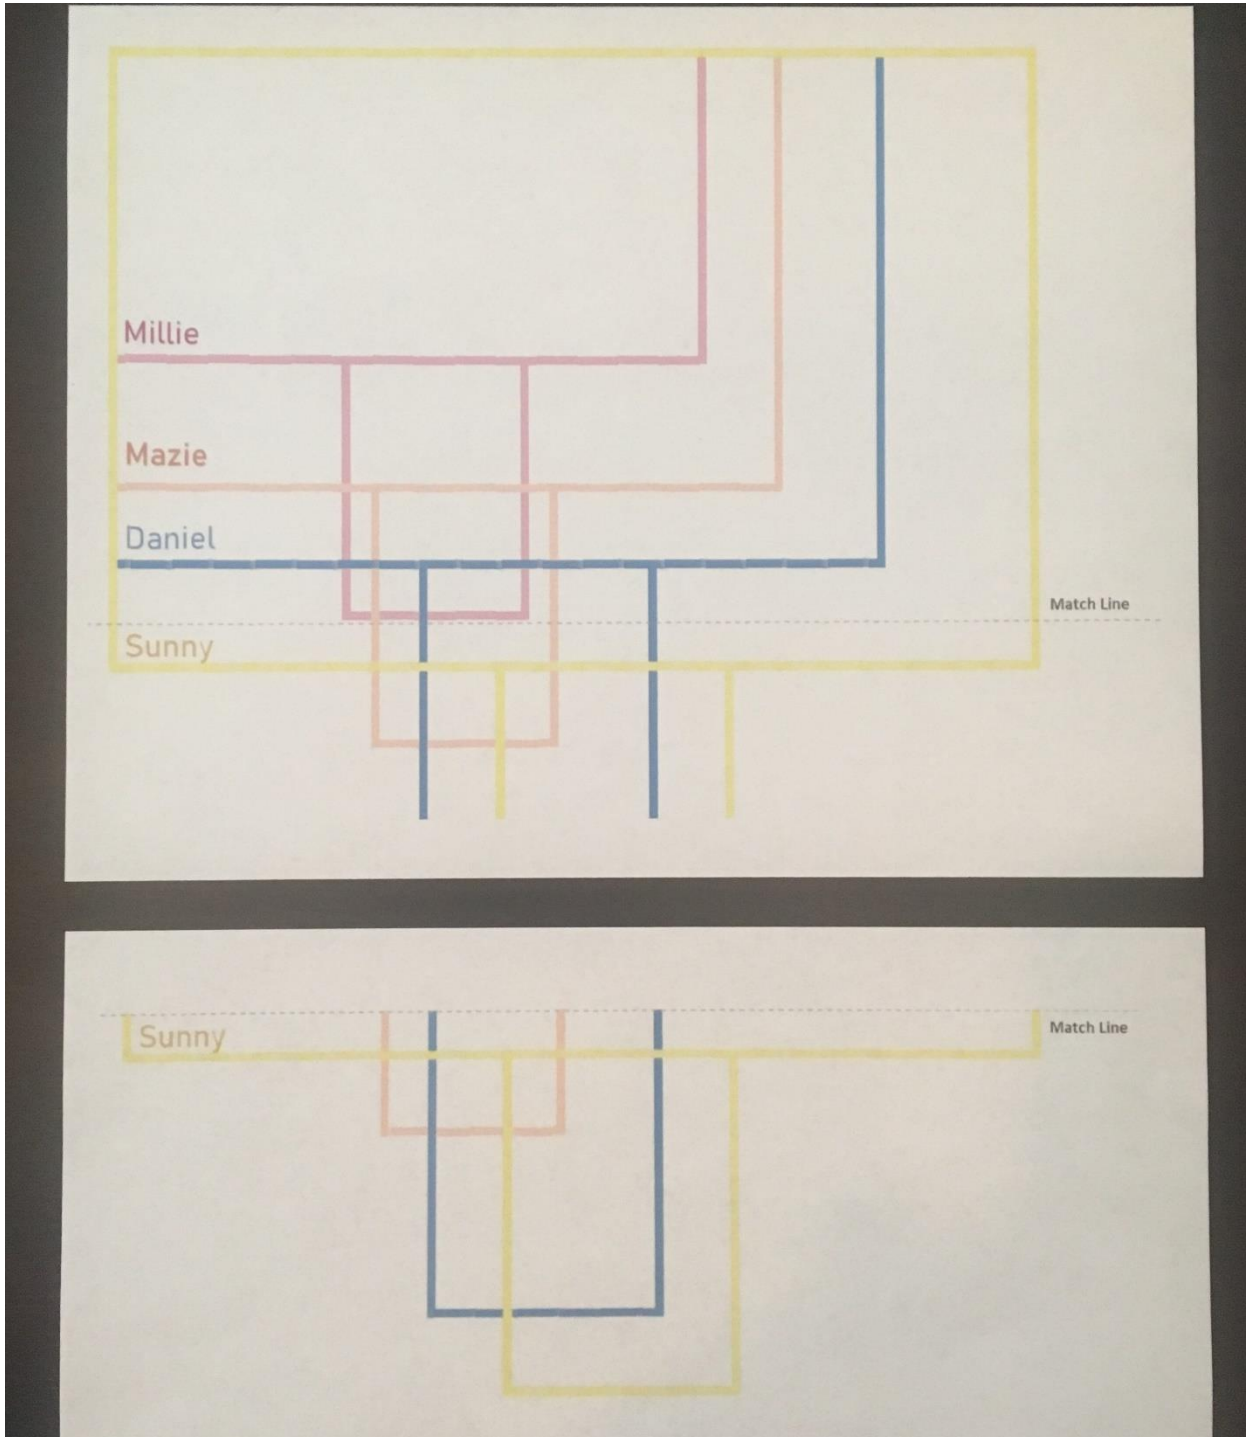


Match up the two pages on the "Match Line" and tape together

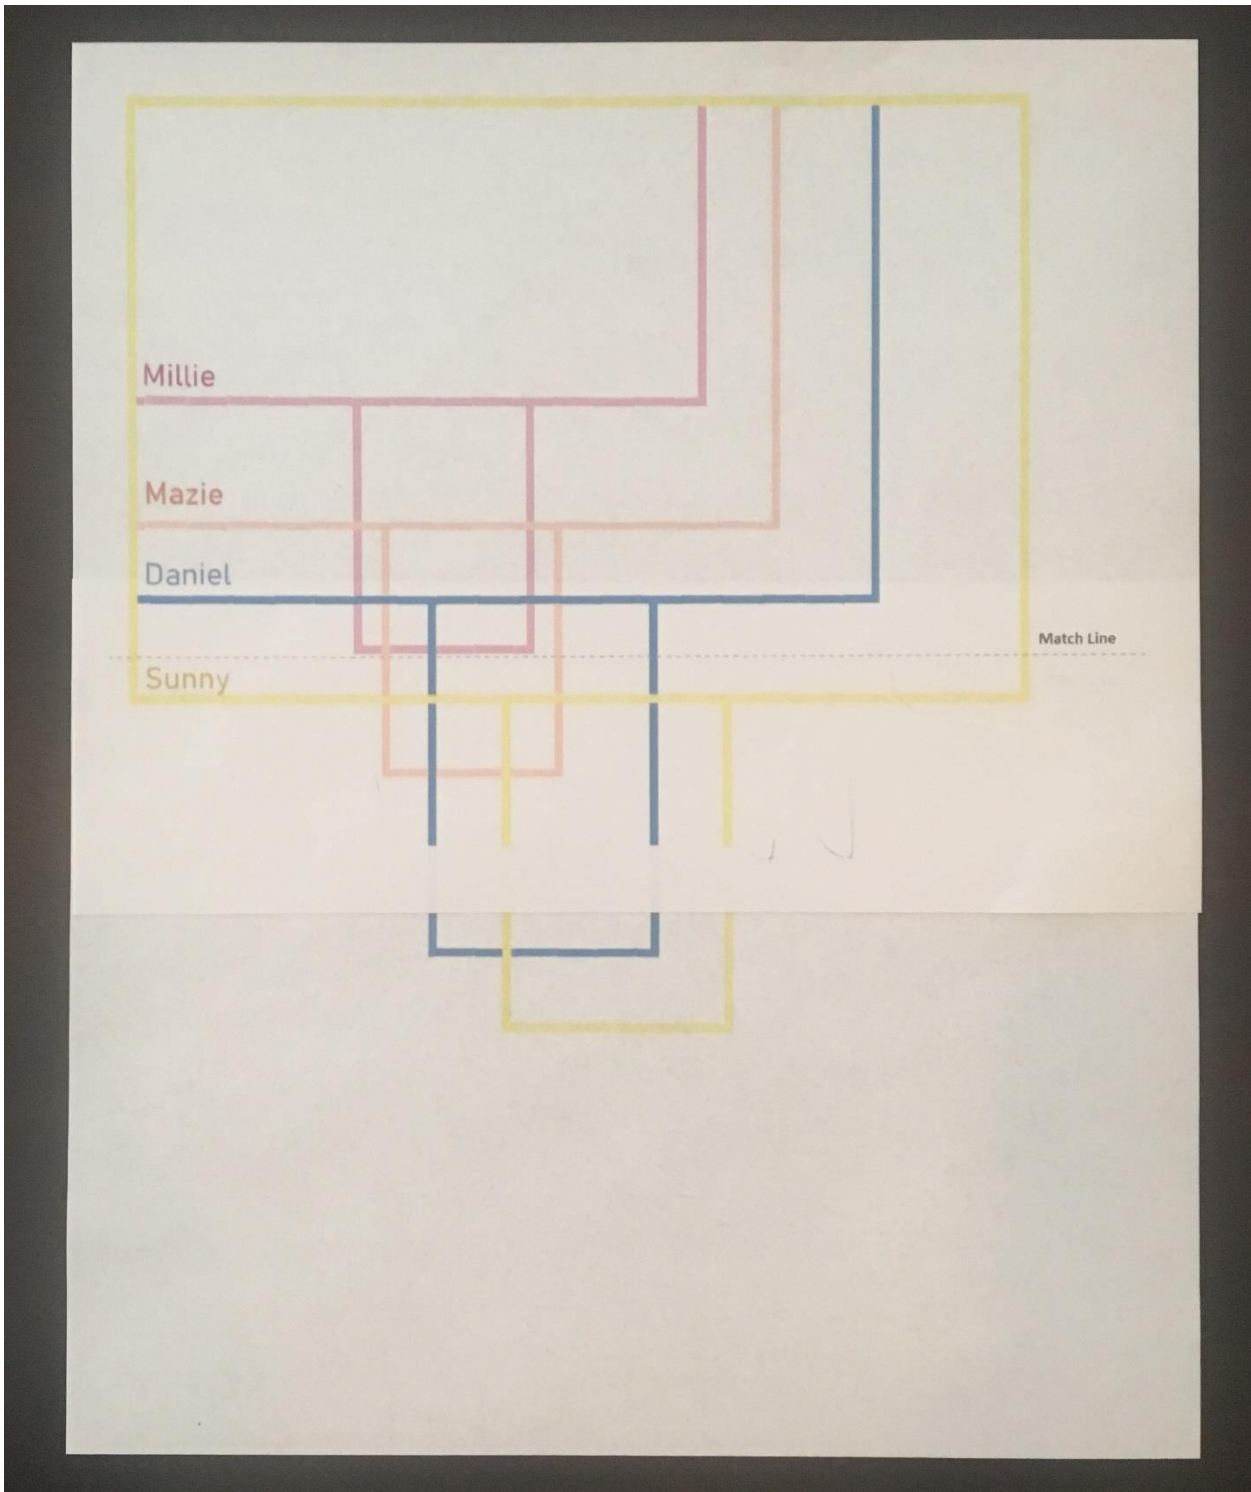


Choose size you would like to use and cut around that outline (Mazie Pictured)

Millie

Mazie

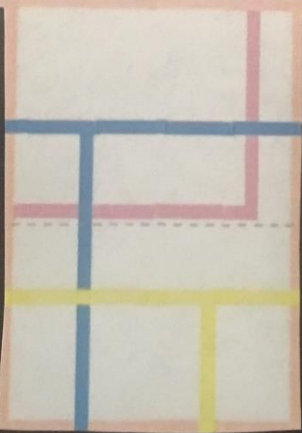

Repeat for all sizes desired

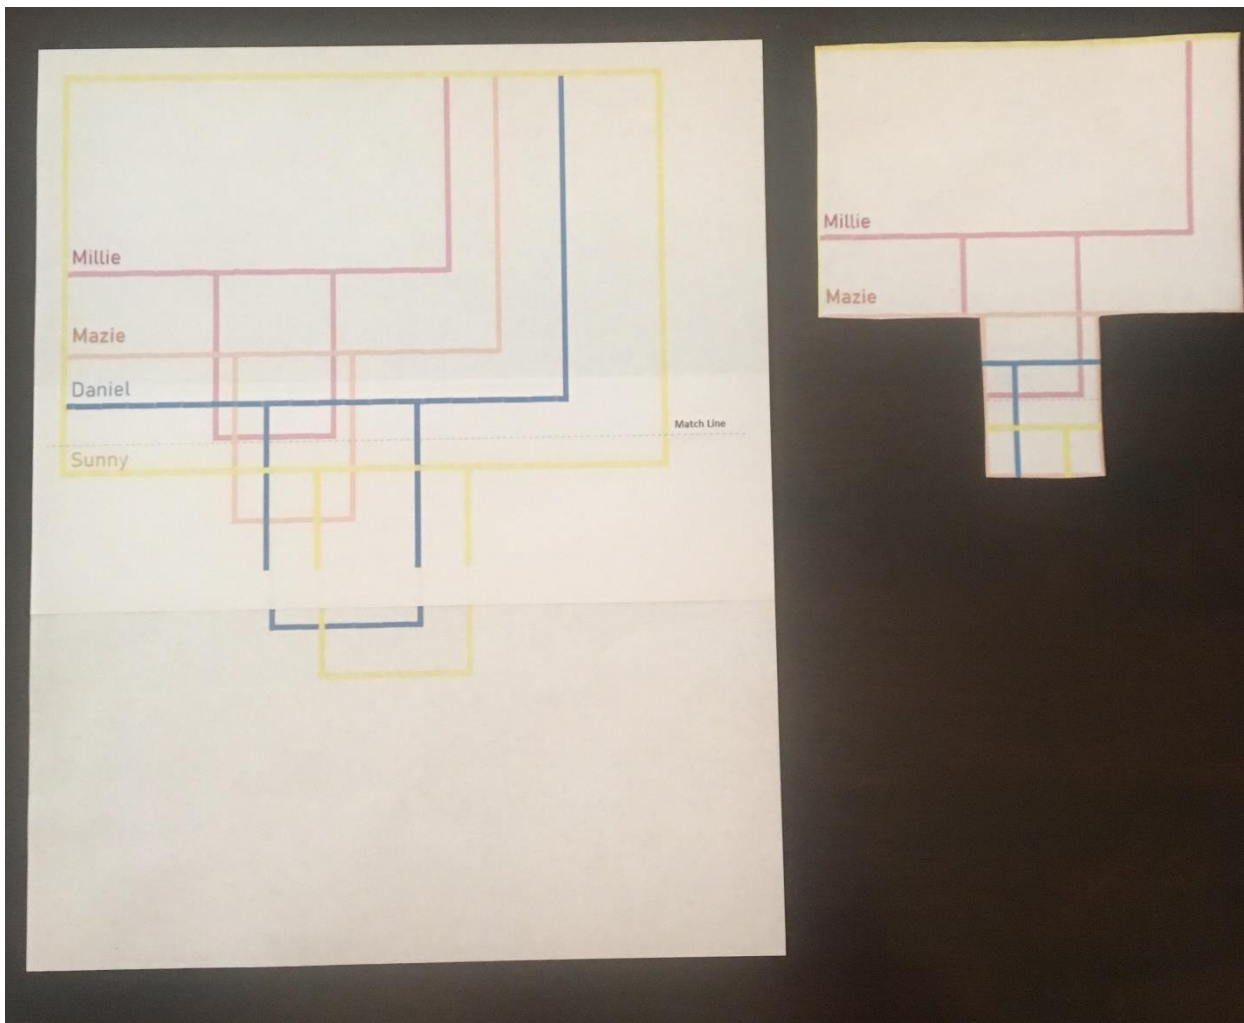

Arm Holes should be placed as follows:

Millie – 2" from top of sweater, 1" opening (left to right) and 1" in between the holes

Mazie – 2" from top of sweater, 1.25" opening (left to right) and 1.25" in between the holes

Daniel – 2.5" from top of sweater, 1.5" opening (left to right) and 1.5" in between the holes

Sunny – 3" from top of sweater, 1.75" opening (left to right) and 1.75" in between the holes

Tail Holes should be placed as follows:

Millie and Mazie – 2" from bottom of tail flap, .75" opening (left to right)

Daniel and Sunny – 2.5" from bottom of tail flap, 1" opening (left to right)

Velcro:

Make sure you purchase sew-on Velcro or you will break many needles. Sew it on as directed in the crochet pattern (pictured below)

In this picture, the scratchy velcro is the larger piece on the left, and the small piece on the right is the soft side.



In this picture, the larger section is the soft side, and the small piece on the flap is the scratchy side. The two smaller models have one row of the soft velcro, and the two larger models have two rows.

